

EEEL

ALUMINUM LED EDGELIT EXIT SIGN

Illumination

- Ultra bright, energy efficient, long life Red or Green LED.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.

STANDARD



OPTIONAL



Electrical

- Dual 120/277 voltage standard. Optional multi-tap 208/220/240 voltage available.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



Mounting

- Aluminum mounting canopy included for top, end or back mount.

Housing

- Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).
- Self-adhesive chevron appliques and guide template provided for directional indication.

Dimensions

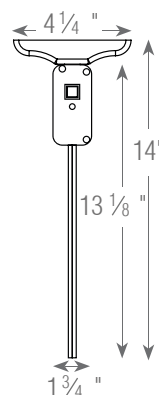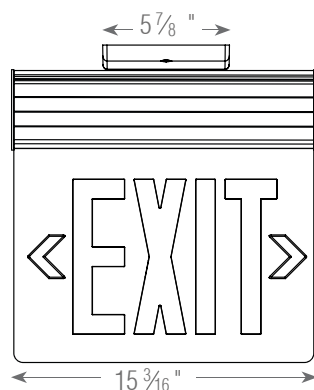

Options

- **SDT:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- **2C:** Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- **Custom:** Signs available with requested 'special' wording.
- **USA:** Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- **SPV:** UL Listed for special voltage option.

Warranty / Listing



- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

How To Order

Sample Part Number: EEL-1-R-W-EM-USA

Model	N° Of Faces		Letter Color		Panel		Housing Color		Battery		Options	
EEL	1	Single Face	R	Red	C	Clear ¹	W	White	Blank	AC Only	SDT	Self- diagnostic ³
					M	Mirror	B	Black			Custom	Custom Wording
	2	Double face	G	Green	W	White	A	Aluminum	EM	Battery Backup	2C	Dual Circuit Operation ⁴
											USA	Assembled in USA
											SPV	228/220/240 Volt, 50/60Hz ²

NOTES

¹ With single face only

² Not available with SDT

³ Available only with EM units

⁴ Available only with AC units