



BREVA-R

Recessed Ceiling Mount Edge-lit exit sign

Construction

- Steel housing with extruded aluminum trim plate
- Panel features a curved contour for maximum illumination and clarity
- 6 inch EXIT lettering legend available in red or green
- Field installed stick-on chevrons
- Choice of housing and trim plate finishes, off white or textured aluminum



Mounting

- Fully recessed ceiling mount
- Hanger bars included for lay-in installation in T-bar grid

Electronics

- 120/277 60Hz

Warranty

- Unit has a five-year limited warranty

Special wording panels

- Available. Contact your sales representative with your design requirement


Approvals

- UL 924 listed
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards
- E-California Energy Commission Title 20

Power consumption

| Model | AC specs | | DC specs | |
|--------------|---------------|----------------|---------------|-----------------|
| AC-only | 120 to 277VAC | Less than 1.5W | — | — |
| AC/DC remote | 120 to 277VAC | Less than 1.5W | 6 to 24VDC | Less than 1.5W |
| Self-powered | 120 to 277VAC | Less than 2.5W | Ni-Cd battery | Min. 90 minutes |

Dimensions

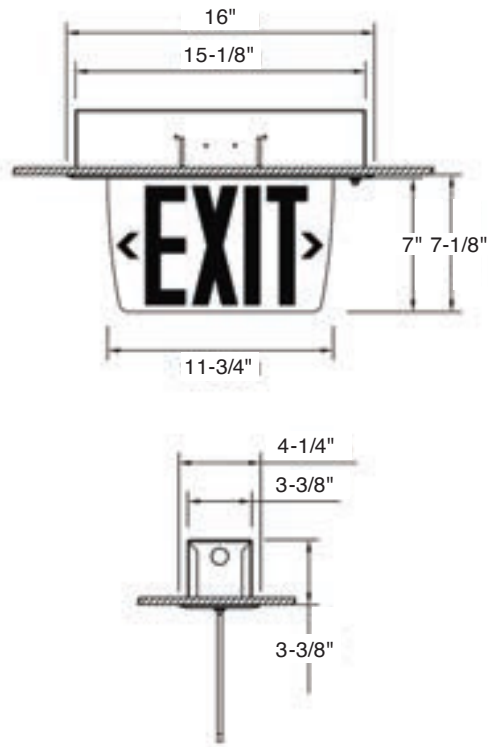

How To Order

Example: BEVER-TA-E-F-1-RC

| Housing color | Housing color | Trim | Face | Legend color |
|-----------------------------|---------------------------------|-----------------------|------------------|-------------------------------|
| BEVER-TA= Textured aluminum | E= AC | F= Recessed flat trim | 1= Single face | RC= Red on clear ¹ |
| | ES= AC/DC | | | RW= Red on white |
| BEVER-OW= Off white | | | EN= Self-powered | 2= Double face |
| | GC= Green on clear ¹ | | | |
| | | | | GM= Green on mirror |