



BREVA-S

Slim Profile Surface Mount LED edge-lit exit sign

Construction

- Die-cast aluminum housing
- Panel features a curved contour for maximum illumination and clarity
- 6 inch EXIT lettering legend available in red or green
- Field installed stick-on chevrons
- Choice of housing and trim plate finishes, off white or textured aluminum



Mounting

- Surface mount
- Canopy included for wall, end or ceiling mount applications

Electronics

- 120/277 60Hz

Warranty

- Unit has a five-year limited warranty

Special wording panels

- Available. Contact your sales representative with your design requirement

Approvals

- UL 924 listed
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards
- E-California Energy Commission Title 20

Power consumption

Model	AC specs		DC specs	
AC-only	120 to 277VAC	Less than 2W	—	—
AC/DC remote	120 to 277VAC	Less than 2W	6 to 24VDC	Less than 1.5W
Self-powered	120 to 277VAC	Less than 3W	Ni-Cd battery	Min. 90 minutes


Housing color



Accessories (order as a separate item)

Description	
White pendant	LGPE-P-WH¹
Black pendant	LGPE-P-BK¹

Dimensions

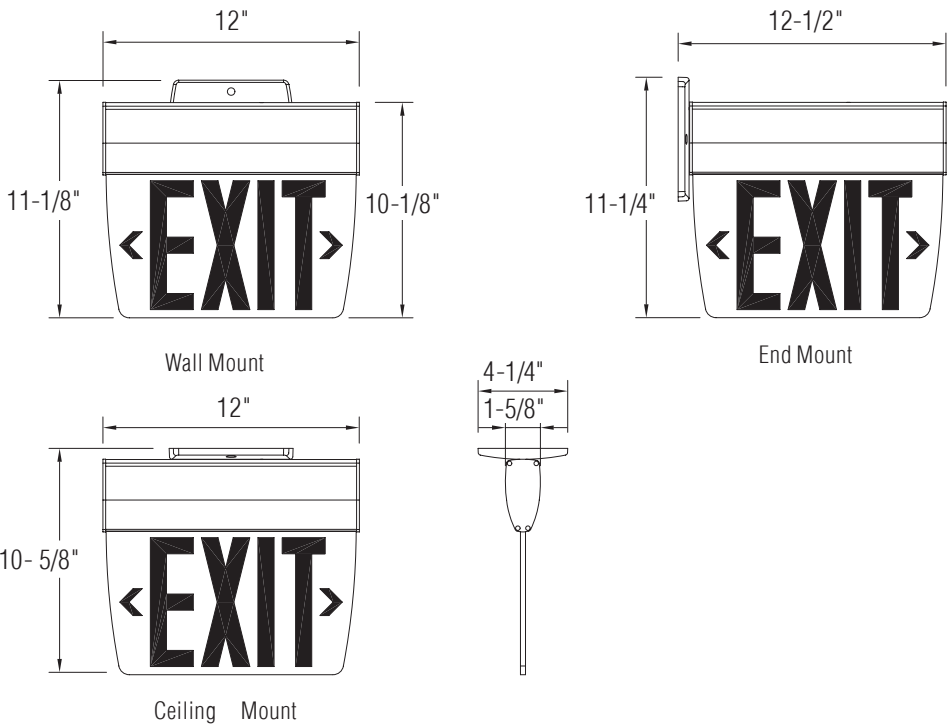

How To Order

Example: BEVE-S-TA-E-F-1-RC

Housing color	Housing color	Face	Legend color
BEVE-S-TA= Textured aluminum	E= AC	1= Single face	RC= Red on clear¹
	ES= AC/DC		RW= Red on white
BEVE-S-OW= Off white	EN= Self-powered	2= Double face	RM= Red on mirror
			GC= Green on clear¹
			GM= Green on mirror