



LGELLC

CHICAGO APPROVED STEEL LED EMERGENCY UNIT

Illumination

- Two, 6V, 5.3W adjustable white LED lamp heads.

STANDARD



Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 10W standard on 20W models


Mounting

- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.

Housing

- Durable 20-gauge steel construction.
- Neutral white or black finish.

Dimensions

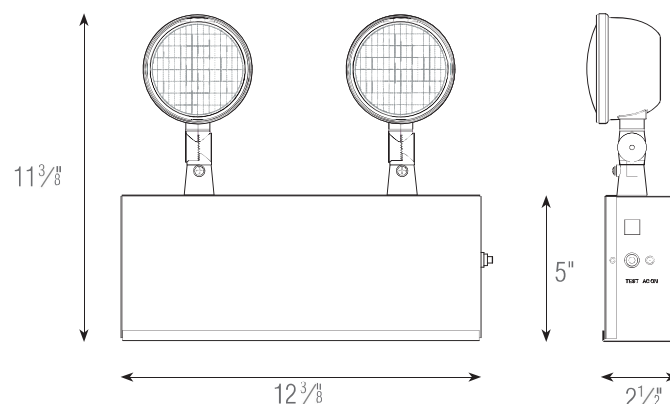



Warranty / Listing



- Five year warranty on all electronics and housing. Battery pro rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C – 50°C standard).
- Meets city of Chicago requirements.

How To Order

Sample Part Number: LGELLC-W-10

Model	Housing Color	Wattage
LGELLC	-W =White	-10 =10 Watts
	-B =Black	-20 =20 Watts (10 watt remote)